



## HUSQVARNA 120iTK4-P without battery and charger

Husqvarna 120iTK4 battery pole saw combines petrol performance with zero direct emission and quiet operation. 120iTK4 is a Telescopic pole product, which means that you can combine the “body” of the machine with either a pole saw or a hedge attachment. This makes it a versatile and convenient tool for several operations depending on the task at hand. Equipped with a telescopic tube with up to 4m reach and split shaft for easy transportation.



### Transport mode

Split the product in half for easy transportation and storage.



### Quiet operation


The low noise provides a comfortable work situation and low disturbance for others.

### savE™

Choose between normal or savE™ mode, depending on conditions, for maximum power or maximum runtime. Either way, you'll always get a perfect result.

### Telescopic tube

The tube has a telescopic function for quick cutting height adjustment

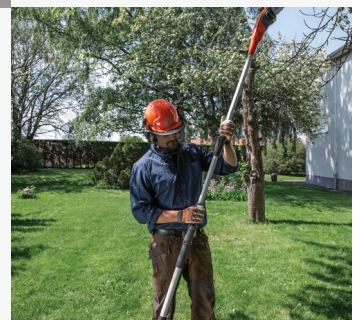

## FEATURES

- Choose savE™ mode for maximum runtime
- Quiet operation
- Split the product in half for easy transportation and storage.
- Telescopic tube for quick cutting height adjustment
- Automatically shut down when left unattended
- The batteries within our system are built to be used over a long time, are quick to recharge and even quicker to swap for continuous use.
- 100 - 200 Series battery products have a compact, slimmed-down design for excellent ergonomics.
- Tool less chain tensioner

### Technical Specifications

<b>BATTERY</b>	
Battery	Yes
Battery capacity	2.0 Ah
Battery type	Li-Ion
Battery voltage	36 V
<b>CAPACITY</b>	
Chain speed at max power	10 m/s
Oil pump capacity Max	5 ml/min
Power output	0.4 kW
<b>DIMENSIONS</b>	
Article gross weight	6600 g
Article net weight	5100 g
Bar length	25 cm
Full length, including cutting equipment	304 cm
Size	10
Tube diameter	35 mm
Tube length	1900 mm
Weight (excl. battery and cutting equipment)	3.55 kg
Weight (excl. cutting equipment)	3.55 kg
<b>ENGINE</b>	
Motor type	PMDC (2 brushed)
<b>EQUIPMENT</b>	
Chain type	H00
Connected digital function set (calc)	Husqvarna Common Service Tool : N/A N/A
Pitch	1/4"
Sprocket type	Spur
Connectivity	Not applicable
<b>LUBRICANTS</b>	
Oil tank volume	0.07 l
Power/fuel type	Battery
<b>MATERIALS</b>	
Master pack: Paper + Cardboard	0 g
Metal total	0 g
Paper	125 g
Paper + Cardboard total	1723 g
PE foil	5 g
PE total	5 g
PET total	2 g
Plastic foil	5 g
Plastic rigid	0 g
Plastic total	5 g
PS/EPS/HIPS total	0 g
<b>PACKAGING</b>	
Packaging height	150 mm
Packaging length	1400 mm
Packaging volume	48.30 dm <sup>3</sup>
Packaging width	230 mm
Quantity in Master pack	1
<b>SOUND AND NOISE</b>	
Sound power level, guaranteed (LWA)	97 dB(A)
Sound power level, measured	93.79 dB(A)
Sound pressure level at operators ear	80.6 dB(A)
<b>VIBRATIONS</b>	
Daily Vibration (Aeqv)	1.475 m/s <sup>2</sup>
Daily Vibration Exposure (A8)	1.475 m/s <sup>2</sup>
Daily Vibration Time (Time factor)	3 h
Equivalent vibration level (ahv, eq), front handle, collapsed	0.793 m/s <sup>2</sup>
Equivalent vibration level (ahv, eq) rear handle	0.773 m/s <sup>2</sup>
Equivalent vibration level (ahv, eq), rear handle, extended	0.773 m/s <sup>2</sup>
Vibrations handlebar	1.475 m/s <sup>2</sup>